

# PATENT COOPERATION TREATY

## PCT

### NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark  
Office  
(Box PCT)  
Crystal Plaza 2  
Washington, DC 20231  
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

<b>Date of mailing (day/month/year)</b> 16 July 1999 (16.07.99)	
<b>International application No.</b> PCT/FI98/01033	<b>Applicant's or agent's file reference</b> 302465/AR
<b>International filing date (day/month/year)</b> 30 December 1998 (30.12.98)	<b>Priority date (day/month/year)</b> 31 December 1997 (31.12.97)
<b>Applicant</b> LEHTONEN, Harri	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

11 June 1999 (11.06.99)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).


<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b>  <p style="text-align: center;">A. Karkachi</p> Telephone No.: (41-22) 338.83.38
--	--



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B06B 1/16</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/34935</b> (43) International Publication Date: 15 July 1999 (15.07.99)
<p>(21) International Application Number: PCT/FI98/01033</p> <p>(22) International Filing Date: 30 December 1998 (30.12.98)</p> <p>(30) Priority Data: 974667 31 December 1997 (31.12.97) FI</p> <p>(71) Applicant (for all designated States except US): NORDBERG-LOKOMO OY [FI/FI]; PL 306, FIN-33101 Tampere (FI).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): LEHTONEN, Harri [FI/FI]; Taipaleentie 14, FIN-33900 Tampere (FI).</p> <p>(74) Agent: RUSKA &amp; CO. OY; Runeberginkatu 5, FIN-00100 Helsinki (FI).</p>		<p>(81) Designated States: AU, BR, CN, JP, MX, NO, PL, RU, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report.</p>

(54) Title: A VIBRATING AGGREGATE

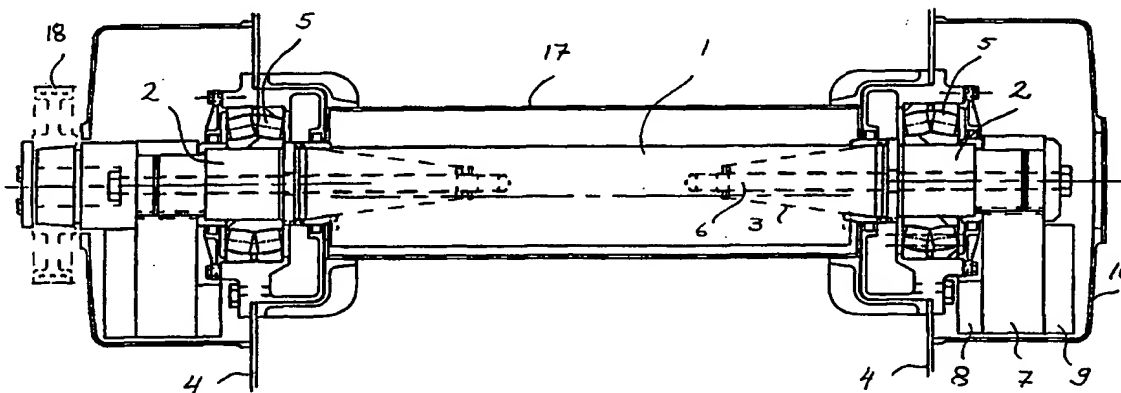

## (57) Abstract

A vibrating aggregate for vibrating a piece attached thereto. The aggregate includes a shaft (1, 2), an eccentric mass connected thereto eccentrically and transmission arrangements for driving the shaft. A shaft section (2) located in both ends of the shaft and mounted by means of a bearing in the piece to be vibrated is detachably connected to the end of the connecting shaft (1) connecting the shaft sections by a joint (3) transmitting torque moment. The joint (3) between the shaft section (2) mounted by means of a bearing in the piece to be vibrated and the connecting shaft (1) is rigid and transmits therefore bending moment as well.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## A VIBRATING AGGREGATE

### Technical Field

The invention concerns a vibrating aggregate according to the preamble of claim 1.

5 The invention relates to vibrating aggregates used in devices to be vibrated (typically in vibrating feeders and vibrating screens). A vibrating aggregate includes an eccentric mass whereby the screen basket or the feeder body connected to the aggregate and lying on springs begins to move by the influence exerted by the eccentric mass when the eccentric mass is rotated. When using one eccentric mass the movement of the screen or the feeder  
10 has the form of a circular orbit. When using two rotating eccentric masses mechanically coupled to each other a linear impact motion is produced, its direction being changeable by changing the phase difference between the rotation of the eccentric masses. The length of the impact motion or stroke can be adjusted by adjusting the size of the eccentric masses.

### 15 Background Art

FR 2 668 960 discloses one well-known aggregate type. The aggregate shown in figure 1 thereof, representing the prior art, consists of a continuous connecting shaft driven by a pulley coupled thereto. Eccentric weights are coupled to the shaft by a cotter joint. The eccentric weights are provided with additional weights so as to increase the force of the  
20 vibration (i.e. the length of the stroke). The aggregate body and the bearing housings of the bearings of the connecting shafts are fixed to the side plate of the screen basket/feeder body by a screw joint.

A aggregate like this is large and therefore cumbersome. Because screens/feeders often work in a dusty environment, the aggregate, when it is serviced or repaired (when a bearing  
25 is changed, for example), has to be opened so that its oil chamber becomes exposed to dust and dirt. In vibratory use, the cleanliness of oil is even more crucial than usually as far as the service life of the bearings is concerned.

The same publication discloses an aggregate type developed to solve the problems with the earlier aggregate type. In the improved solution the connecting shaft is composed of  
30 separate sections connected to each other. The sections of the shaft are connected to each

other by cotter or pin couplings (figures 2 and 7) or by articulated joints (figure 9) transmitting torque moment - but not bending moment. The joint between them is easy to dismount. The advantage of this technique is that the bearing combination at each end of the connecting shaft is separately detachable from the aggregate, together with the bearing housing and the oil chamber connected thereto. Consequently, the bearing arrangement can be serviced and repaired detached from the screen/feeder in a repair shop. Similarly, the spare parts service is easier because the change of parts does not take much time and the assembly of the aggregate part to be changed can be finished in workshop conditions to such an extent that the inconveniences caused by the difficult circumstances under the final mounting are controllable. Besides, the aggregate is easier to handle because it can be disassembled into smaller sections.

However, the aggregate presents a problem in that the technical realization of the bearing arrangement is more difficult. The connecting shaft being no longer rigid, both shaft ends have to be supported by two successive bearings, on both sides of the side plate, so that they can take the bending moment. Consequently, the bearings lie at a short distance from each other, which makes the aggregate very critical to the placement of the vibrating masses. Therefore, it has been necessary to divide the vibrating weight into equal parts accurately on both sides of the side plate to balance the force applied to the bearings. When it is desired to adjust the length of the impact motion or stroke of the screen/feeder, it is necessary to connect additional weights to both eccentric weights, or, at least to change the axial position of one weight as the mass of the other weight increases. If this is not done, the bearing arrangement is subjected to a bending moment which stresses the bearings unevenly so that they wear out earlier.

Because of the above, solving of the problems with the earlier aggregates in the way proposed in FR 2 668 960 has caused the aggregate structure to become radically more complicated and the production costs to increase.

### Disclosure of Invention

A vibrating aggregate according to claim 1 has now been invented. In a vibrating aggregate according to the invention the joint between the shaft sections is rigid and without a clearance, and it transmits not only torque moment but also bending moment.

5 The advantage of the rigid shaft joint is that the aggregate can be mounted on the side plate of the screen basket/feeder body by means of one self-aligning bearing. In addition to the advantages of the earlier solutions (ease of disassembling and serviceable from outside of the screen basket/feeder body without having to open the oil chamber at the site, ease of handling), an aggregate according to the invention presents, for example, the following  
10 advantages:

- Cost savings resulting from the simple structure (no complicated articulated shaft, less bearings).
- The same basic aggregate can be used for different kinds of vibrating devices because it is easy to adjust. Hence it can be manufactured in large series and at low production  
15 costs.
- The bearings last long because the bearing loads are even and the misalignments of the shafts are insignificant.

### Brief Description of Drawings

20 The invention and the details thereof will be described in the following text with reference to the enclosed drawings wherein

Figure 1 is a longitudinal section of an aggregate according to one embodiment of the invention,

Figure 2 is an enlarged view of the joint and the vibrating aggregate module used in the  
25 aggregate of figure 1,

Figure 3 is a longitudinal section of an aggregate according to another embodiment seen from above,

Figures 4 - 7 show different joint alternatives seen from the side and from the end of the shaft.

### Modes for Carrying Out the Invention

In a vibrating aggregate of a modular construction according to the invention, a connecting shaft 1 is connected to module shafts 2 by a joint without a clearance, transmitting both torque and bending moment. Preferably, this joint is a cone joint which in itself is known, for example, from machine tools as a way of connecting tools. A vibrating aggregate module shown in figure 2 forms an entity easily detachable from the device to be vibrated. The cone joint surface tapering towards that end of both module shafts which is connected to the connecting shaft is denoted by reference number 3. Both ends of the connecting shaft have corresponding cone-shaped recesses where the cone of the module shaft can be inserted. The cone angle of the cone joint has to be big enough so that it does not make the joint self-locking and difficult to dismount.

The aggregate is mounted on a side plate 4 of the screen basket/feeder body by one self-aligning spherical bearing 5. Both module shafts are fastened to the connecting shaft by an axial fixing screw 6 extending from the outer end of the module shaft to the connecting shaft through the cone. Furthermore, the cone is mounted to the connecting shaft by means of a pronged locking piece 15 or in another corresponding way of mounting so as to position the module shaft and the connecting shaft in the right position in relation to each other.

A bearing housing 10 functions as a module body and has a cover 11. A sealing ring 12 seals the cover against the module shaft. An oil chamber 13 is connected to the bearing and is sealed against the sealing locking piece 15 by a sealing 14. A sealing 14' is located between the cover 11 and the sealing ring 12. A protecting cover 16 fastened to the side plate 4 protects eccentric weights and a protecting tube 17 protects the connecting shaft.

The vibrating aggregate is driven by a suitable drive mechanism and transmission, for example by a V-belt drive. A pulley 18, located at the end of the other module shaft, is shown in the drawings.

The eccentric weights can be joined to the aggregate in different ways. The eccentric mass can be a separate eccentric weight 7 mounted on the module shaft so that the connecting shaft 1 does not have to be eccentric. The entire eccentric mass can also be placed on

the connecting shaft whereby the connecting shaft does not function only as a transmission shaft but also as an eccentric weight. Thus, the connecting shaft can, for example, be machined eccentric as shown in the drawings.

In the drawings a combination of the eccentric mass arrangements described above is shown, wherein the eccentric mass is placed not only on the connecting shaft 1 but also on the separate eccentric weights 7 fastened to the module shaft 2. Preferably, the centre axis of the connecting shaft is eccentric in the same direction as the eccentric weights 7 in relation to the module shafts. Thus, the connecting shaft and the eccentric weight compensate the misalignment of the module shaft, caused by the eccentricity of each other, at the bearing. This is of great importance as far as the warming-up and the service life of the bearing are concerned.

In addition, the aggregate is easier to adjust than aggregates having a connecting shaft connected by an articulated or flexible joint: additional weights 8, 9 can be joined to the module shaft in order to adjust the length of the impact motion or stroke of the device to be vibrated without stressing the bearing arrangement significantly because the bending moment caused by the additional weights to the module shaft 2 is transmitted to the connecting shaft 1 by means of the rigid shaft joint and the bending moment is not received by the bearing arrangement. Thus, no compensating weights need to be added on the shaft part between the bearings, and the aggregate can be adjusted by operating entirely outside the screen basket/feeder body.

Preferably, the extra weights 8, 9 are joined to the eccentric weights 7.

When using a cone joint between the connecting shaft and the module shafts, the advantage is obtained that in order to connect the shafts to each other one axial screw 6 reachable from the end of the aggregate is sufficient.

An aggregate according to the invention is, as shown in figure 3, can also be used for two-shaft use wherein two aggregates are coupled to each other by a gear transmission 19 in order to direct the impact motion of the aggregate to be vibrated.

The embodiments described above are to be considered not restrictive in character, the spirit and scope of the invention being limited solely by the appended claims. It is also pos-




sible to place the cone of the cone joint at the end of the connecting shaft. In that case the module shaft has a corresponding recess. Alternatives to the joint between the shaft sections are shown in figures 4 – 7. The cone joint can be replaced by a pyramid joint (figure 4) having a square-shaped cross-section instead of the circular cross-section of a cone. Furthermore, the joint can be composed of different kinds of prongs or flanges (figure 7).

An aggregate according to the invention can be used not only in vibrating feeders and conveyors and vibrating screens but also in other kinds of vibrating devices, such as in vibrating devices and vibrating rollers for compression of masses.


## Claims

1. A vibrating aggregate for vibrating a piece attached thereto, which aggregate includes a shaft (1, 2), an eccentric mass connected thereto eccentrically and transmission arrangements for driving the shaft, whereby a shaft section (2) located at both ends of the shaft and mounted by means of a bearing in the piece to be vibrated is detachably connected to the end of the connecting shaft (1) connecting the shaft sections by a joint (3) transmitting torque moment, **characterized** in that the joint (3) between the shaft section (2) mounted by means of a bearing in the piece to be vibrated and the connecting shaft (1) is rigid and transmits therefore bending moment as well.
2. A vibrating aggregate as claimed in claim 1, **characterized** in that the joint (3) between the shaft section (2) mounted by means of a bearing in the piece to be vibrated and the connecting shaft (1) has counter surfaces in contact with each other.
3. A vibrating aggregate as claimed in claim 2, **characterized** in that the joint (3) between the shaft section (2) mounted by means of a bearing in the piece to be vibrated and the connecting shaft (1) has a recess at the end of one part and a projection (3) that can be inserted into the recess at the end of the other part.
4. A vibrating aggregate as claimed in claim 3, **characterized** in that the recess tapers towards its bottom and the projection (3) tapers towards its point.
5. A vibrating aggregate as claimed in claim 4, **characterized** in that the joint (3) is a cone joint.
6. A vibrating aggregate as claimed in claim 4, **characterized** in that the joint (3) is a pyramid joint.
7. A vibrating aggregate as claimed in any one of claims 1 to 6, **characterized** in that the joint (3) is locked by means of an axial screw (6).

1/7

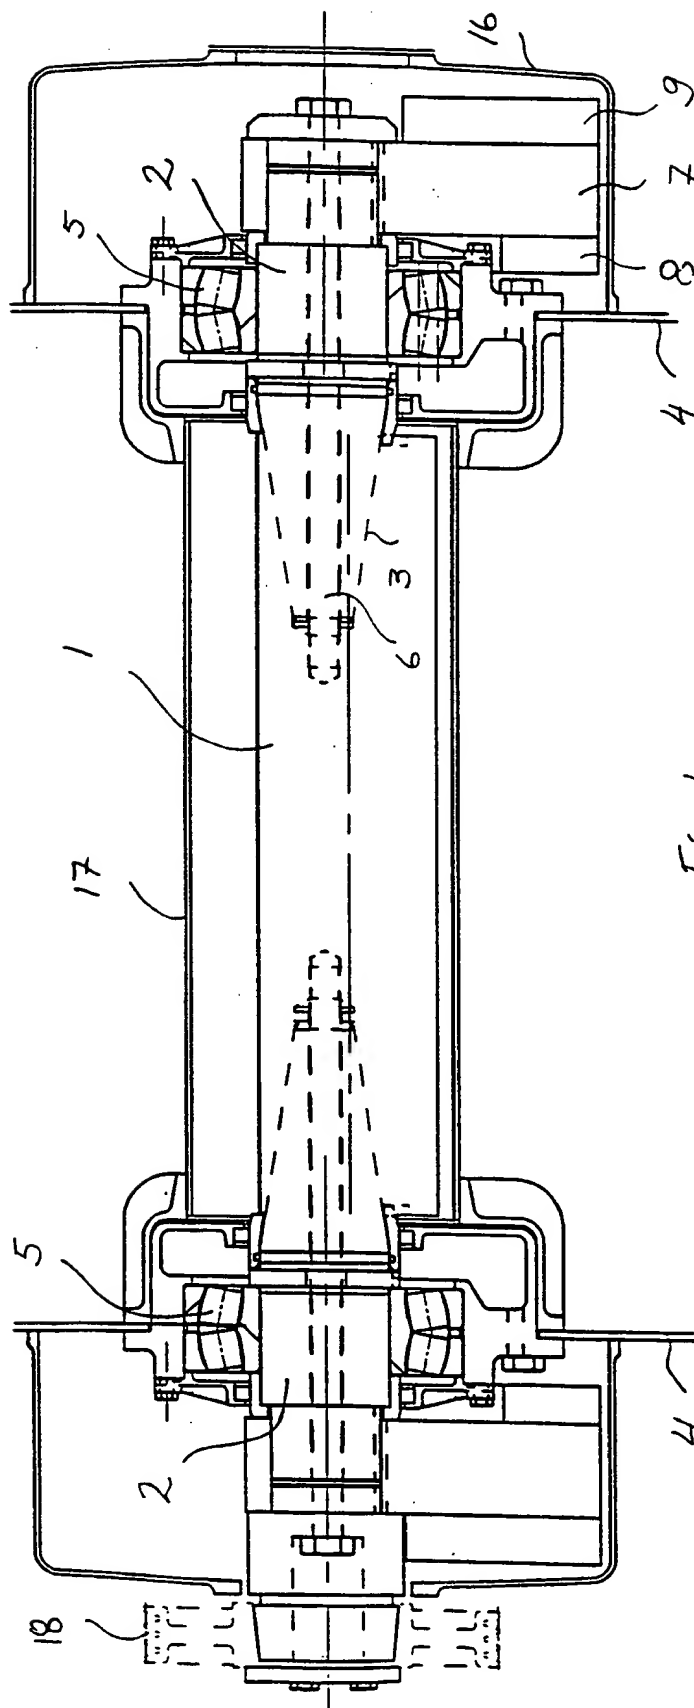

2/7

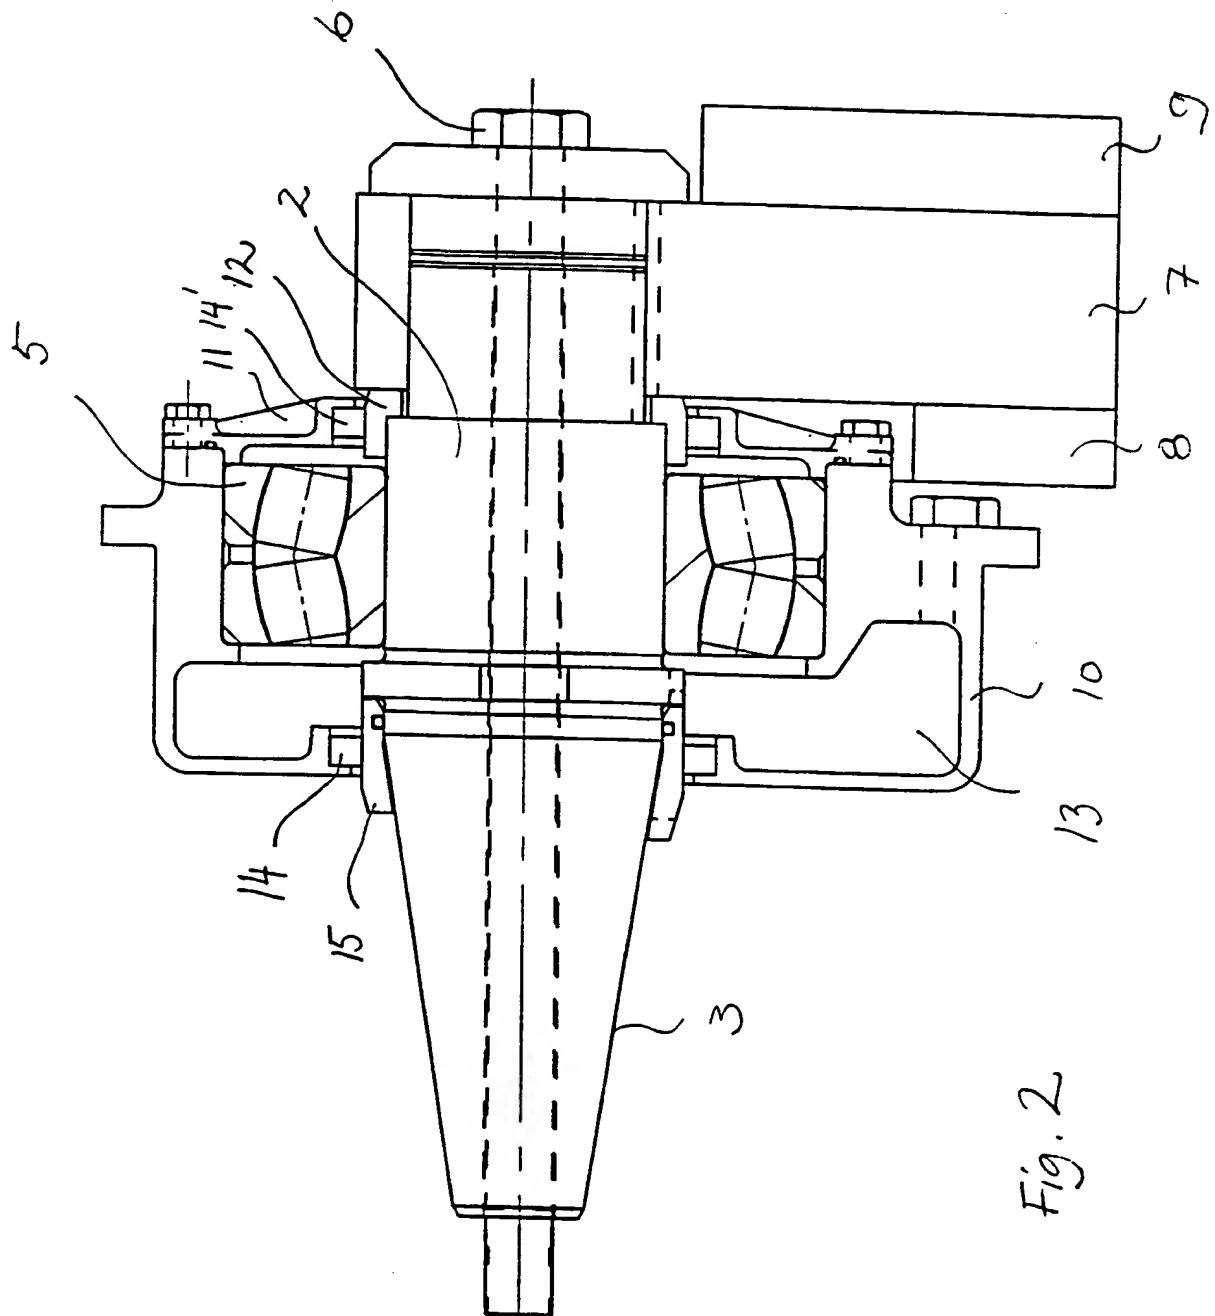

3/7

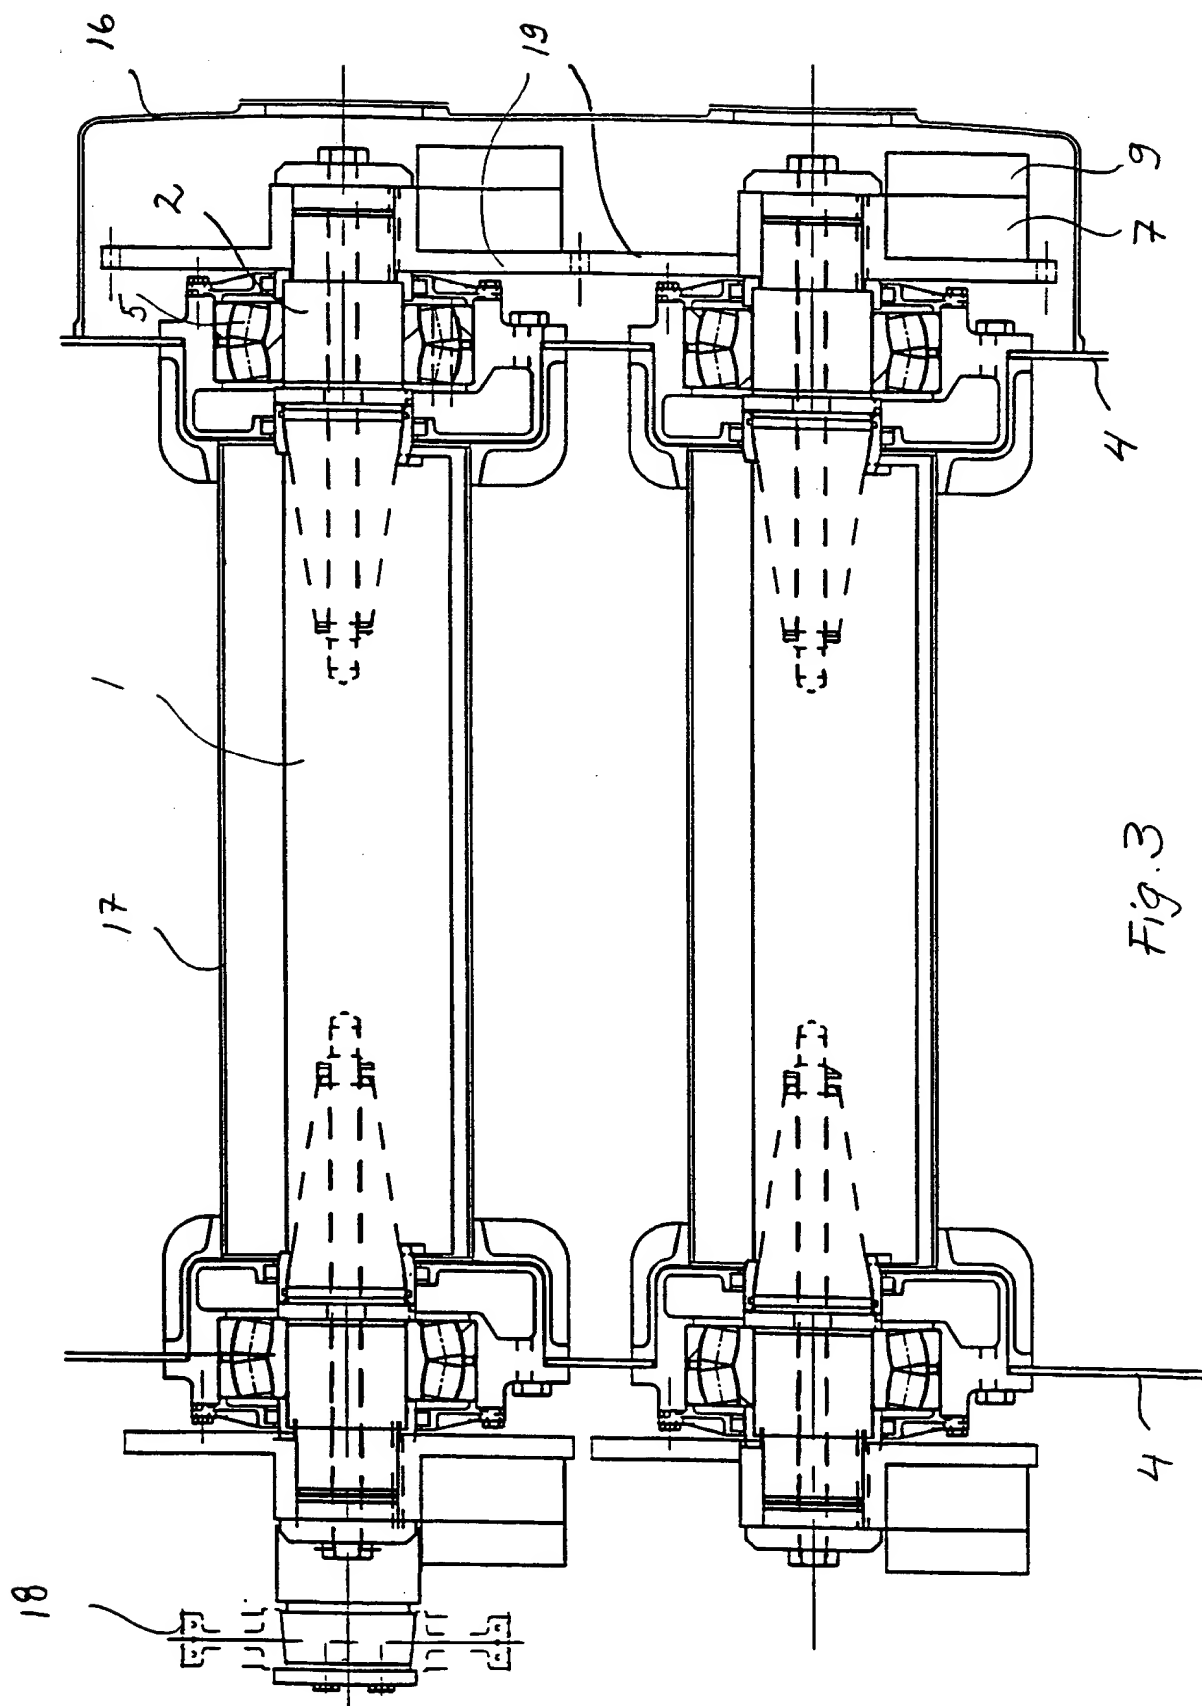


Fig. 3

4/7

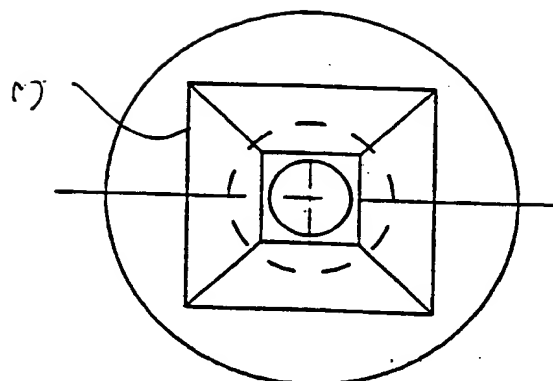


Fig. 4b

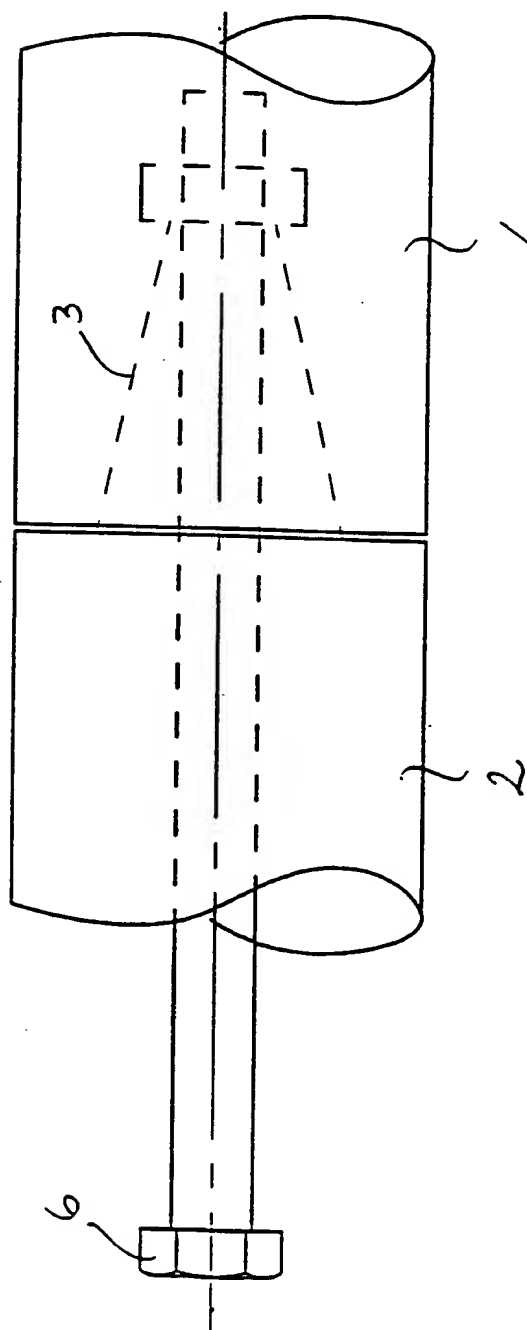


Fig. 4a

5/7

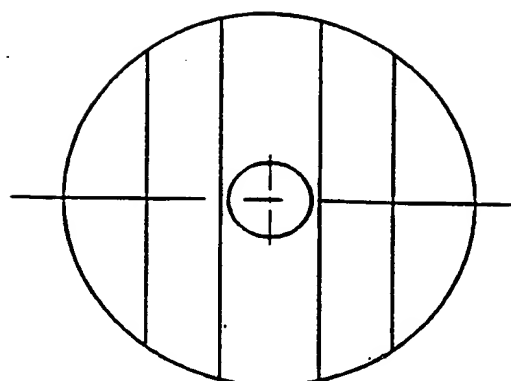


Fig. 5b

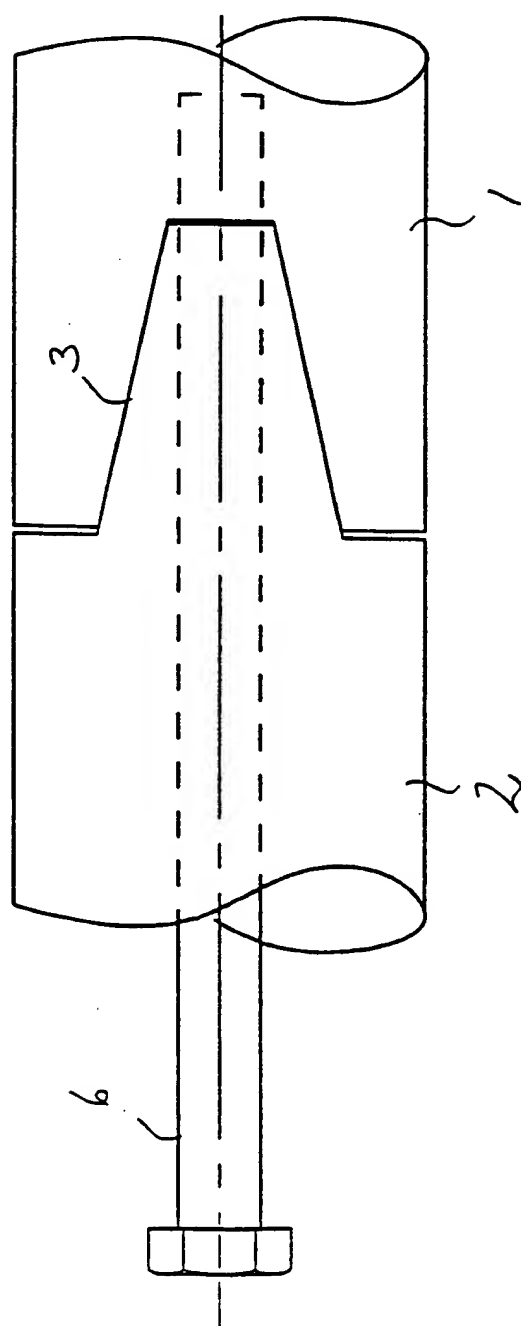


Fig. 5a

6/7

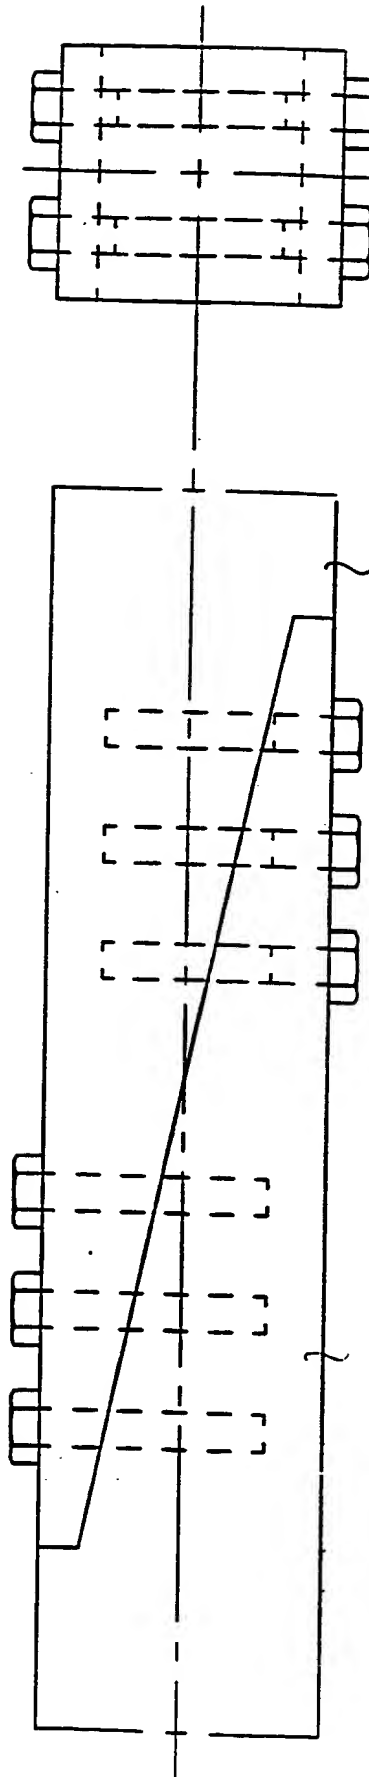


Fig. 6b

Fig. 6a



7/7

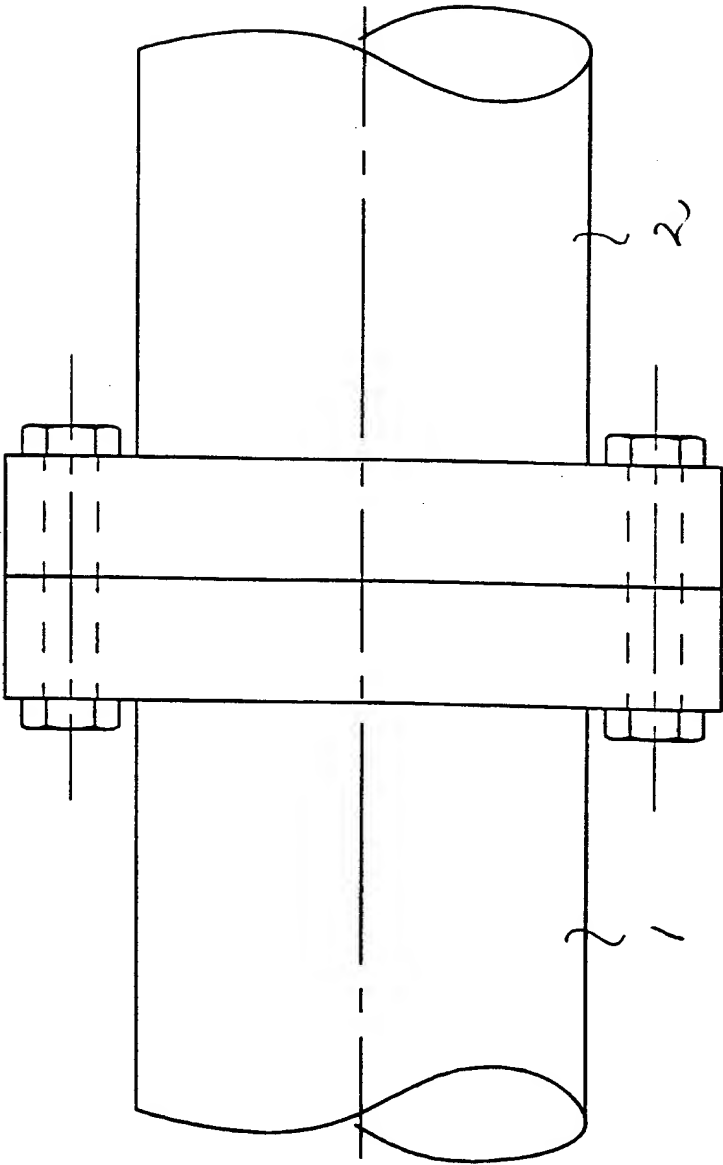


Fig. 7

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/01033

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
<b>IPC6: B06B 1/16</b> According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
<b>IPC6: B06B</b>		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
<b>SE,DK,FI,NO classes as above</b>		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>EDOC, WPI, JAPIO</b>		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 1876271 A (R.W. BAILY), 6 Sept 1932 (06.09.32), fig 2; details Q,Q',P,R; p. 2 line 120 - p. 3 line 9 --	1-5
A	SE 505856 C2 (FABRICA DE ACO PAULISTA LTDA), 20 October 1997 (20.10.97) --	1
A	EP 0239561 A2 (VOEST-ALPINE AKTIENGESELLSCHAFT), 30 Sept 1987 (30.09.87) --	1
A	US 1979548 A (W.H. HORSCH), 6 November 1934 (06.11.34) --	1
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
9 April 1999		13 -04- 1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer  Leif Vingård Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/01033

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4034246 A (NAKASHIMA ET AL), 5 July 1977 (05.07.77), figure 1  --	1
A	US 4590814 A (WADENSTEN), 27 May 1986 (27.05.86), figure 1  -- -----	1

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/03/99

International application No.  
PCT/FI 98/01033

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	1876271	A	06/09/32	NONE	
SE	505856	C2	20/10/97	DE 4118619 A	14/05/92
				FR 2668960 A,B	15/05/92
				GB 2249608 A,B	13/05/92
				SE 9102857 A	13/05/92
				US 5220846 A	22/06/93
EP	0239561	A2	30/09/87	AT 83386 A	15/06/89
				AT 389723 B	25/01/90
				DE 3780666 A	03/09/92
US	1979548	A	06/11/34	NONE	
US	4034246	A	05/07/77	DE 2545539 A	08/07/76
				JP 51075903 A	30/06/76
				JP 52005412 A	17/01/77
US	4590814	A	27/05/86	CA 1151906 A	16/08/83
				US 4583414 A	22/04/86
				US 4587863 A	13/05/86